




## SS-10-240/DIN\_1K5

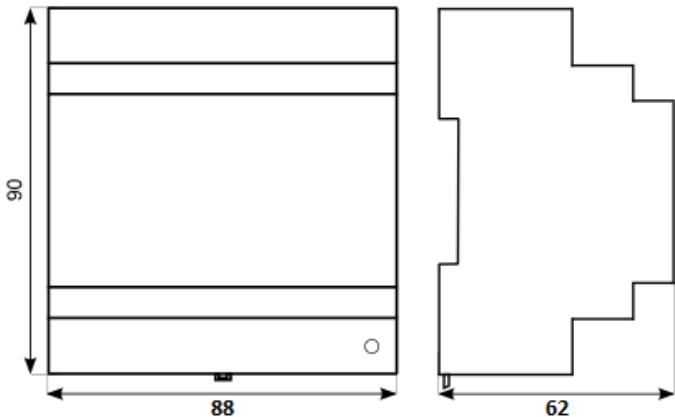

### DESCRIPTION

DC / DC converter with high input voltage, designed for direct supply of control and monitoring systems from PV strings or from traction voltage. The converter is characterized by low self-consumption. Safe separation of primary and secondary circuits. Operation is indicated by an LED. Designed for DIN rail mounting.

### TECHNICAL PARAMETERS

#### Input Data

Input voltage, DC	300-1500 V DC
Input current, DC max.	40 mA
Input fuse	Yes (internal)

#### Output Data

Output voltage	24 V DC (+/-5 %)
Output current	400 mA max.
Output power	10 W
Power derating	-2 %/°C from 50 °C to 70 °C ambient temperature.
Short-circuit protection	Yes (auto resume)
Max. residual ripple	<150 mV

#### General Data

Efficiency, max.	approx. 86 %
Max. power loss (nominal load)	approx. 4,7 W
Impulse withstand	7,5 V line to line, 7,5 kV line to case
Isolation between primary and secondary	8 kV hi-pot test, double insulation
Cooling	natural (free air)
IP code	IP20
Weight	250 g
Material of enclosure	NORYL
Dimensions	90 x 88 x 62 mm
Class of protection	II.



Pollution degree 2  
RoHS comply Yes

**Connection data**

	<b>Input</b>	<b>Output</b>
Number of terminals	4 (++,-)	6 (+++,---)
Cable length max.	unrestricted	<3m
Wire cross-section		
Solid min/max	0,5/6 mm <sup>2</sup> 20/10 AWG	0,5/2,5 mm <sup>2</sup> 20/13 AWG
Flexible min/max	0,5/4 mm <sup>2</sup> 20/12 AWG	0,5/2,5 mm <sup>2</sup> 20/13 AWG
Tightening torque, min/max	0,5/0,6 Nm	0,5/0,6 Nm

**Signal indication**

Device working LED green

**Environmental conditions**

Operating temperature	-35°C to 70 °C
Relative humidity (non-condensing)	5% to 90 %RH
Installation altitude	<3000 m above sea level

The power supply is designed for continuous operation, overvoltage category in installation 3 according to EN 61010-1 and is resistant to short-circuit at the output.

**TECHNICAL STANDARDS**

Safety	EN 61204-7 ed.2
EMC	EN 61000-6-1 ed.2
	EN 61000-6-3 ed.2

**Limited warranty****3 years****PACKING AND STORAGE**

The product is supplied bulk packaged, user's guide for each piece is included.

Storage temperature -40 to 80 °C, relative humidity < 90 % (not condensing). It is prohibited to expose the product to mechanical shocks and injurious gases.