


## JS-300-275/DIN2\_CH

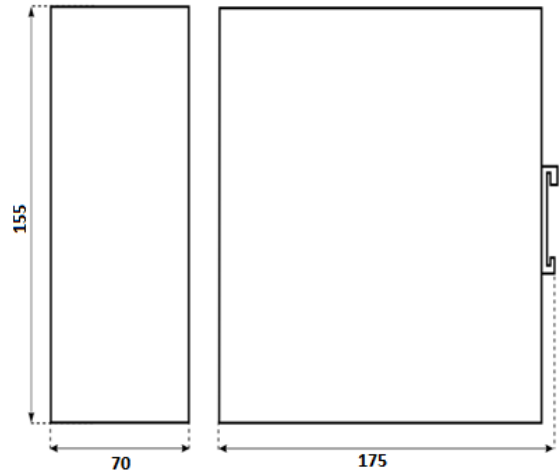

### DESCRIPTION

Switching power supply - AC/DC charger for supplying of electronic devices backed up by lead, NiCd or NiMH battery. Temperature compensation of the charging voltage. Mounting on DIN35 rail. LED operation indication and relay contacts.

### TECHNICAL PARAMETERS

#### Input Data

Input voltage, DC	180 - 260 V AC
Frequency of input	47-63 Hz
Input current, DC max.	1,7 A at 230 V AC
Input fuse	Yes (internal T 6,5 AH / 250 V AC)

#### Output Data

Output voltage	27,5 V DC (adjustable +/- 5 %)
Output current	10 A max. (current limit - sum of charging and output current)
Output power	275 W
Temperature compensation voltage	-3 mV / article / ° C (initial temperature 25 ° C, terminal blocks T +, T-)
Power derating	-2 %/°C from 40 °C to 50 °C ambient temperature
Short-circuit protection	Yes (auto resume)
Max. residual ripple	<150 mV

#### General Data

Efficiency, max.	approx. 87 %
Max. power loss (nominal load)	approx. 41 W
Parallel connection of outputs	Yes (integrated isolating diode on the output and LS switch)
Impulse withstand	0,5 kV between L and N, 0,5 kV between L,N and frame
Electrical strength	4 kV between primary and secondary (double insulation), 2 kV primary-frame
Cooling	natural (free air)
IP code	IP20

Weight	1400 g
Material of enclosure	Al + FeZN sheet



Dimensions	70 x 155 x 175 mm
Class of protection	I.
Pollution degree	2
RoHS comply	Yes

<b>Connection data</b>	<b>Input</b>	<b>Output</b>	<b>Other</b>
Number of terminals	3 (L,N,PE)	4 (++,-)	4(COM, NO, T+, T-)
Wire cross-section			
Solid min/max	0,5/2,5 mm <sup>2</sup> 20/13 AWG	0,5/2,5 mm <sup>2</sup> 20/13 AWG	0,25/1,5 mm <sup>2</sup> 23/15 AWG
Flexible min/max	0,5/2,5 mm <sup>2</sup> 20/13 AWG	0,5/2,5 mm <sup>2</sup> 20/13 AWG	0,25/1,5 mm <sup>2</sup> 23/15 AWG
Tightening torque, min/max	0,5/0,6 Nm	0,5/0,6 Nm	0,5/0,6 Nm

**Signal indication**

Device working	LED green and relay contact (connected COM, NO)
----------------	---

**Environmental conditions**

Operating temperature	-20 °C to 50 °C
Relative humidity (non-condensing)	10 % to 90 % RH
Installation altitude	<3000 m above sea level

The power supply is designed for continuous operation, overvoltage category in installation 3 according to EN 61010-1 and is resistant to short-circuit at the output.

**TECHNICAL STANDARDS**

Safety	EN 61204-7 ed.2
EMC	EN 61000-6-1 ed.2 EN 61000-6-3 ed.2

**Limited warranty****5 years****PACKING AND STORAGE**

The product is supplied bulk packaged, user's guide for each piece is included.

Storage temperature -25 to 70 °C, relative humidity < 80 % (not condensing). It is prohibited to expose the product to mechanical shocks and injurious gases.